

Extending MISP with Python modules

MISP - Threat Sharing

Team MISP Project

<http://www.misp-project.org/>

Twitter: *@MISPProject*

GSMA Edition




MISP
Threat Sharing

- Ways to extend MISP before modules
 - ▶ APIs (PyMISP, MISP API)
 - Works really well
 - **No integration with the UI**
 - ▶ Change the core code
 - Have to change the core of MISP, diverge from upstream
 - Needs a deep understanding of MISP internals
 - Let's not beat around the bush: **Everyone hates PHP**

GOALS FOR THE MODULE SYSTEM

- Have a way to extend MISP without altering the core
- Get started **quickly** without a need to study the internals
- Make the **modules as light weight as possible**
 - ▶ Module developers should only have to worry about the data transformation
 - ▶ Modules should have a simple and clean skeleton
- In a friendlier language - **Python**

MISP MODULES - EXTENDING MISP WITH PYTHON SCRIPTS

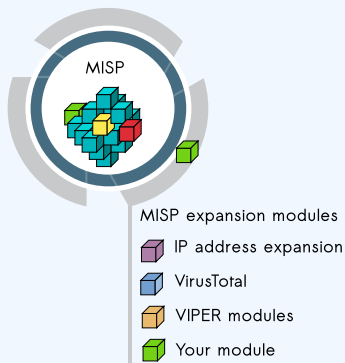

- Extending MISP with expansion modules with zero customization in MISP.
- A simple ReST API between the modules and MISP allowing auto-discovery of new modules with their features.
- Benefit from existing Python modules in Viper or any other tools.
- MISP modules functionality introduced in MISP 2.4.28.
- MISP import/export modules introduced in MISP 2.4.50.

- MISP modules can be run on the same system or on a remote server.
- Python 3 is required to run MISP modules.
 - ▶ `sudo apt-get install python3-dev python3-pip libpq5`
 - ▶ `cd /usr/local/src/`
 - ▶ `sudo git clone https://github.com/MISP/misp-modules.git`
 - ▶ `cd misp-modules`
 - ▶ `sudo pip3 install -I -r REQUIREMENTS`
 - ▶ `sudo pip3 install -I .`
 - ▶ `sudo vi /etc/rc.local`, add this line: `'sudo -u www-data misp-modules -s &'`

- `http://127.0.0.1:6666/modules` - introspection interface to get **all modules available**
 - ▶ returns a JSON with a description of each module
- `http://127.0.0.1:6666/query` - interface to **query a specific module**
 - ▶ to send a JSON to query the module
- **MISP autodiscovers** the available modules and the MISP site administrator can enable modules as they wish.
- If a configuration is required for a module, **MISP adds automatically the option** in the server settings.

FINDING AVAILABLE MISP MODULES

■ `curl -s http://127.0.0.1:6666/modules`

```
1      {
2        "type": "expansion",
3        "name": "dns",
4        "meta": {
5          "module-type": [
6            "expansion",
7            "hover"
8          ],
9          "description": "Simple DNS expansion service
10             to resolve IP address from MISP
11             attributes",
12          "author": "Alexandre Dulaunoy",
13          "version": "0.1"
14        },
15        "mispattributes": {
16          "output": [
17            "ip-src",
18            "ip-dst"
19          ],
20          "input": [
21            "hostname",
22            "domain"
23          ]
24        }
25      }
```

Server settings

Overview MISP settings (18) GnuPG settings (3) Proxy settings (5) Security settings (2) Misc settings (1) Plugin settings (22) Diagnostics Workers

Enrichment

Priority	Setting	Value	Description
Critical	Plugin.Enrichment_services_enable	true	Enable/disable the enrichment services
Recommended	Plugin.Enrichment_services_url	http://127.0.0.1	The url used to access the enrichment services
Recommended	Plugin.Enrichment_services_port	6666	The port used to access the enrichment services
Recommended	Plugin.Enrichment_cve_enabled	false	Enable or disable the cve module
Recommended	Plugin.Enrichment_dns_enabled	true	Enable or disable the dns module
Recommended	Plugin.Enrichment_sourcecache_enabled	false	Enable or disable the sourcecache module
Recommended	Plugin.Enrichment_sourcecache_archivepath		Set this required module parameter
Recommended	Plugin.Enrichment_passivetotal_enabled	true	Enable or disable the passivetotal module
Recommended	Plugin.Enrichment_passivetotal_username	alexandre.dulaunoy@circl.lu	Set this required module parameter
Recommended	Plugin.Enrichment_passivetotal_password		Set this required module parameter

MISP MODULES - HOW IT'S INTEGRATED IN THE UI?

Filters: All	File	Network	Financial	Proposal	Correlation
Value	Comment	Related Events	IDS	Distribution	Actions
microsoft.com			No	Inherit	
google.com		25	No	Inherit	
circl.lu			No	Inherit	

Choose the enrichment module that you wish to use for the expansion

dns

Cancel

Org	Category	Type	Value	Comment	Related Events	IDS
3	Network activity	domain	microsoft.com			No
3	Network activity	domain	google.com		25	No
3	Network activity	domain	circl.lu			No

Enrichment Results

Below you can see the attributes that are to be created. Make sure that the categories and the types are correct, often several options will be offered based on an inconclusive automatic resolution.

Value	Category	Type	IDS <input type="checkbox"/>	Comment	Actions
23.100.122.175	Network activity	ip-src	<input type="checkbox"/>	Imported via the freetext import.	

ip-src → ip-dst

Update all comment fields

- Expansion modules - enrich data that is in MISP
 - ▶ Hover type - showing the expanded values directly on the attributes
 - ▶ Expansion type - showing and adding the expanded values via a proposal form
- Import modules - import new data into MISP
- Export modules - export existing data from MISP

QUERYING A MODULE

- `curl -s http://127.0.0.1:6666/query -H "Content-Type: application/json" -data @body.json -X POST`

body.json

1 `{"module": "dns", "hostname": "www.circl.lu"}`

- and the response of the dns module:

1 `{"results": [{"values": ["149.13.33.14"],`
2 `"types": ["ip-src", "ip-dst"]}]}`

CREATING YOUR MODULE - DNS MODULE

```
import json
import dns.resolver
misperrors = {'error': 'Error'}
mispattributes = {'input': ['hostname', 'domain'], 'output': ['ip-src', 'ip-dst']}
moduleinfo = {'version': '0.1', 'author': 'Alexandre_Dulaunoy',
              'description': 'Simple_DNS_expansion_service_to_resolve_IP_address_from_MISP_attributes', 'module-type': ['expansion', 'hover']}

def handler(q=False):
    if q is False:
        return False
    request = json.loads(q)
    if request.get('hostname'):
        toquery = request['hostname']
    elif request.get('domain'):
        toquery = request['domain']
    else:
        return False
    r = dns.resolver.Resolver()
    r.timeout = 2
    r.lifetime = 2
    r.nameservers = ['8.8.8.8']
    try:
        answer = r.query(toquery, 'A')
    except dns.resolver.NXDOMAIN:
        misperrors['error'] = "NXDOMAIN"
        return misperrors
    except dns.exception.Timeout:
        misperrors['error'] = "Timeout"
        return misperrors
    except:
        misperrors['error'] = "DNS_resolving_error"
        return misperrors
    r = {'results': [{ 'types': mispattributes['output'], 'values': [str(answer[o])]}]}
    return r

def introspection():
    return mispattributes

def version():
    return moduleinfo
```

- Copy your module `dns.py` in `modules/expansion/`
- Restart the server `misp-modules.py`

```
[adulau:~/git/misp-modules/bin]$ python3 misp-modules.py
2016-03-20 19:25:43,748 - misp-modules - INFO - MISP modules passivetotal imported
2016-03-20 19:25:43,787 - misp-modules - INFO - MISP modules sourcecache imported
2016-03-20 19:25:43,789 - misp-modules - INFO - MISP modules cve imported
2016-03-20 19:25:43,790 - misp-modules - INFO - MISP modules dns imported
2016-03-20 19:25:43,797 - misp-modules - INFO - MISP modules server started on TCP port 6666
```

- Check if your module is present in the introspection
- `curl -s http://127.0.0.1:6666/modules`
- If yes, test it directly with MISP or via `curl`

CODE SAMPLES (CONFIGURATION)

```
# Configuration at the top
moduleconfig = ['username', 'password']
# Code block in the handler
if request.get('config'):
    if (request['config'].get('username') is None) or (request['config'].get('password') is None):
        misperors['error'] = 'CIRCL_Passive_SSL_authentication_is_missing'
        return misperors

x = pypssl.PySSL(basic_auth=(request['config']['username'], request['config']['password']))
```

- asn history
- CIRCL Passive DNS
- CIRCL Passive SSL
- Country code lookup
- CVE information expansion
- DNS resolver
- DomainTools
- eupi (checking url in phishing database)
- IntelMQ (experimental)
- ipasn
- PassiveTotal -
<http://blog.passivetotal.org/misp-sharing-done-differently>
- sourcecache
- Virustotal
- Whois

- Similar to expansion modules
- Input is a file upload or a text paste
- Output is a list of parsed attributes to be edited and verified by the user
- Some examples
 - ▶ Cuckoo JSON import
 - ▶ email import
 - ▶ OCR module
 - ▶ Open IoC import

- Not the preferred way to export data from MISP
- Input is currently only a single event
- Output is a file in the export format served back to the user
- Will be moved / merged with MISP built-in export modules
 - ▶ Allows export of event / attribute collections

NEW EXPANSION & IMPORT MODULES FORMAT

- Backward compatible - an additional field to extend the format

```
misp_attributes = {'input': [...], 'output': [...],  
                  'format': 'misp_standard'}
```

- Takes a standard MISP attribute as input
- Returns MISP format

- ▶ Attributes
- ▶ Objects (with their references)
- ▶ Tags

```
results = {'Attribute': [...], 'Object': [...],  
          'Tag': [...]}
```

- First modules supporting this new export format
 - ▶ urlhaus expansion module
 - ▶ Joe Sandbox import & query module

NEW EXPANSION & IMPORT MODULES VIEW (MISP 2.4.110)

Enrichment Results

Below you can see the attributes and objects that are to be created from the results of the enrichment module.

Event ID	1229							
Event UUID	5cc3042c-8bb4-4837-9564-47aca964451a							
Event creator org	ORONAME							
Event info	urhaus test							
#Resolved Attributes	14 (2 Objects)							
Category	Type	Value	UUID	Tags	IDS	Disable Correlation	Comment	Distribution
Name: virustotal-report ⌵ References: 0 ⌵								
Other	detection-ratio: text	10 / 66	adc3209e-4651-41a1-4558-5a10399e4be1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
External analysis	permalink: link	https://www.virustotal.com/file/13fa09118f0be1d654e688ba23fcbcd0c21aa73017b6dbcf78570ff47552ed/analysis/1554403108/	40b3d10d-5e81-48c7-91e7-be2b898427b	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
ID: 12700 ⌵ Name: file ⌵ References: 11 ⌵								
Payload delivery	sha256: sha256	d3fa09118f0be1d654e688ba23fcbcd0c21aa73017b6dbcf78570ff47552ed	5026ab08-8f0c-49e4-a485-d69a920295b	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Other	size-in-bytes: size-in-bytes	98304	9ee64454-bef4-4210-a88a-e401599b471	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://automotiveadteam.com/v.exe	e687650e-b672-405f-9be9-2dc39459e5e0	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://shpaldogpoop.com/v.exe	a3986a11-4e60-4b55-ba40-999666402zbc	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://pooperscoopertfranchise.com/v.exe	3778db0d-47b6-4186-a052-746a389509e0	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://cherryhillpooperscoopers.com/v.exe	b804db74-4a62-4cd7-abef-a4b68781411e	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://alldogpoop.net/v.exe	09a672e8-62f9-469f-9c11-53159d22644	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://alldogpoop.mobi/v.exe	4bae6a96-b739-47ad-94c1-d583b2b9c4ae	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://alldogpoop.info/v.exe	0f5ad15b-47e0-4772-act8-d2240a6e0c3	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵
Network activity	url	http://alldogpoop.biz/v.exe	90c29d98-d778-4415-8544-5a2cf53d847	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	f2b701d43a43315105d649612b2	Inherit event ⌵

- Enrichment on full events
- Move the modules to background processes with a messaging system
- Have a way to skip the results preview
 - ▶ Preview can be very heavy
 - ▶ Difficulty is dealing with uncertain results (without the user having final say)



- <https://github.com/MISP/misp-modules>
- <https://github.com/MISP/>
- We welcome new modules and pull requests.
- MISP modules can be designed as standalone application.